

Natural Smoke Ventilation

- AOW hand control ventilation with 24v fail safe open action
- Smokebeta 24v or 230v fail safe open, power close system
- LMC 230v linear motor providing power open and power close cycles

Natural ventilation of smoke filled areas can provide a safer exit for building occupants and clearer access for emergency services



Louvres Sunscreens Natural Ventilators

Ruskin Air Management Limited
Stourbridge Road, Bridgnorth, Shropshire WV15 5BB



Telephone 01746 761921, Facsimile 01746 766450
Website www.naco.co.uk E-mail sales@naco.co.uk

LS10400 (2.05)

Smoke Shaft Ventilation

- achieve 1.5 m² free area
- galvanised steel frame
- stainless steel blades
- 24v or 230v actuators
- failsafe open / power close
- power open and close option
- powder coat grille on vision side

PTC Corridor Dampers provide a fire rated barrier for shaft ventilation systems for control of smoke in residential and commercial buildings

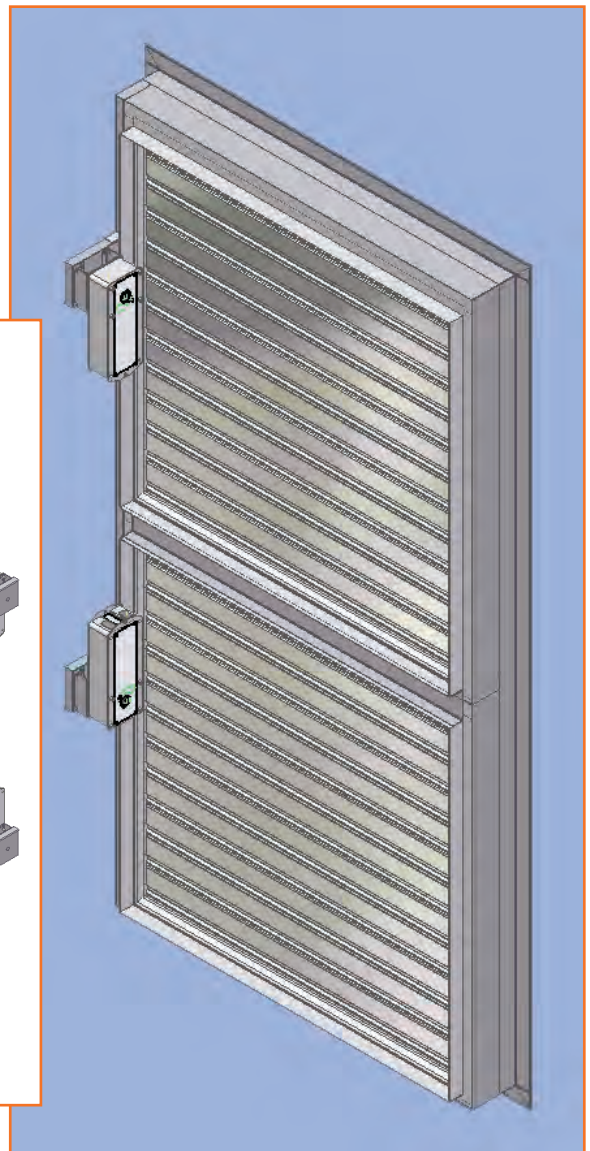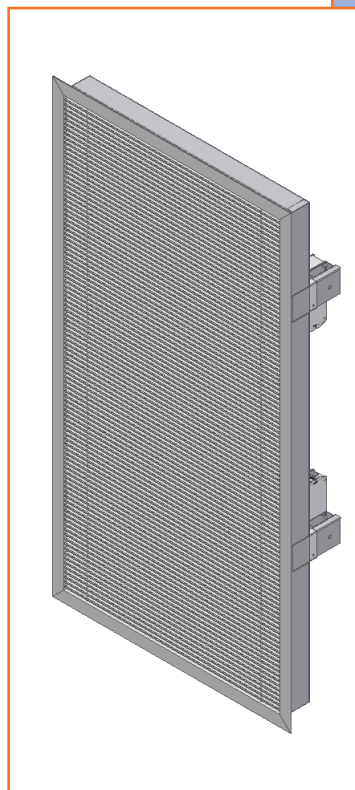

Louvres Sunscreens Natural Ventilators

Ruskin Air Management Limited
Stourbridge Road, Bridgnorth, Shropshire WV15 5BB

Telephone 01746 761921, Facsimile 01746 766450
Website www.naco.co.uk E-mail sales@naco.co.uk

LS10400 (2.05)